




YOUR CONSUMER OWNED ELECTRIC UTILITY SINCE 1893

## 200 AMP UNDERGROUND SERVICE

Cable will not be installed until service has been inspected and passed by the Electrical inspector.

Service will not be energized until Electric service Application has been completed, signed and returned.

Service will not be energized until the Certification of Compliance has been completed, signed and returned by the applicable Town code Enforcement Officer.

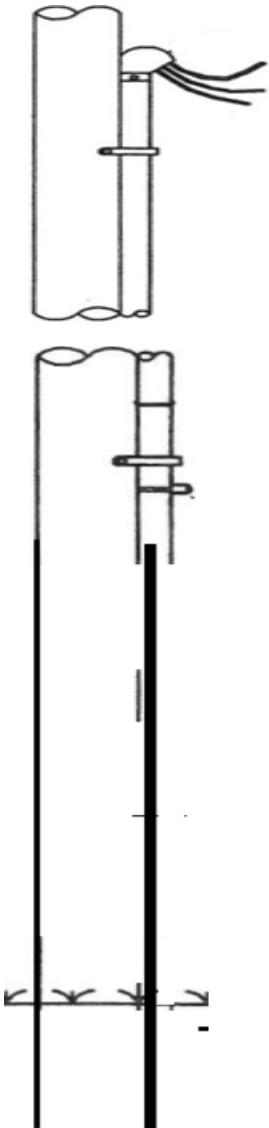

1. Conduit – 2 ½” schedule 40 PVC to be set at a depth of 24 to 30 inches.  
Backfill to be clean sand with no building debris.  
Conduit to end 3 feet from utility pole and continuously piped to the meter box
2. Approved pulling rope to be installed in conduit.  
Trench to be left open at pole.  
Screened sand pile to be left at pole and house.  
One foot of sand to be laid below and above URD cable at the time the underground cable is installed by KLPD or supplied by Customer (private).
3. 200 AMP URD meter socket to be used for 100 AMP or 200 Amp service with disconnect.  
Meter location to be determined by KLPD.  
Meter socket to be set at a height of 5 feet above finished grade.
4. 2 ½” Schedule 80 PVC conduit at meter box, with ground wire to be installed in own conduit with grounding block installed.
5. Caution tape to be installed 6 inches below finished grade.
6. Telephone and cable TV to be installed 12 inches to the side of electrical conduit.
7. Pull rope installed in 2 ½” conduit. If no rope, a minimum \$100.00 charge will apply.
8. All pipe and riser equipment will be supplied by KLPD.  
Prices will vary dependent upon situation